

1》 14 Channel

Channel	Function	Instruction
1	Pan	0-255 Pan
2	Pan speed	0-255 Pan speed
3	Dimmer	0-255 Dimmer
4	LED 1 Dimming	0-255 dimming brightness
5	LED 2 Dimming	0-255 dimming brightness
6	LED 3 Dimming	0-255 dimming brightness
7	LED 4 Dimming	0-255 dimming brightness
8	LED 5 Dimming	0-255 dimming brightness
9	LED 6 Dimming	0-255 dimming brightness
10	LED 7 Dimming	0-255 dimming brightness
11	LED 8 Dimming	0-255 dimming brightness
12	Strobe	0-255 strobe from slow to fast
13	Internal Program	Internal program effect
14	Speed of internal program	Speed of internal program effect

2》 5Channel

Channel	Function	Instruction
1	Pan	0-255 Pan
2	Pan speed	0-255 Pan speed
3	Dimmer	0-255 Dimmer
4	Internal Program	Internal program effect
5	Speed of internal program	Speed of internal program effect

Remark: For M xxx function at master mode, it is internal program at M000, and it is adjusting angle at M1-255.

8 Heads 4 in 1 RGBW LED moving Beam

TPL808



User Manual

KEEP THIS MANUAL FOR FUTURE NEEDS


1、 Technical specifications

- 1.Voltage : AC110V-240V
- 2.Power : 80W
- 3.Channels : 5/14CH
- 4.Production size : 108*8*13CM
- 5.N.W of unit : 7.5KG

2、 Safe and instruction.

1. Please Read these instructions carefully before use this production. And keep this user guide for future consultation.
2. Make sure the power cord is never crimped or damaged.
3. Never disconnect the power cord by pulling on the cord
4. Avoid direct eye exposure to the light source while it is on.

3、 Menu display

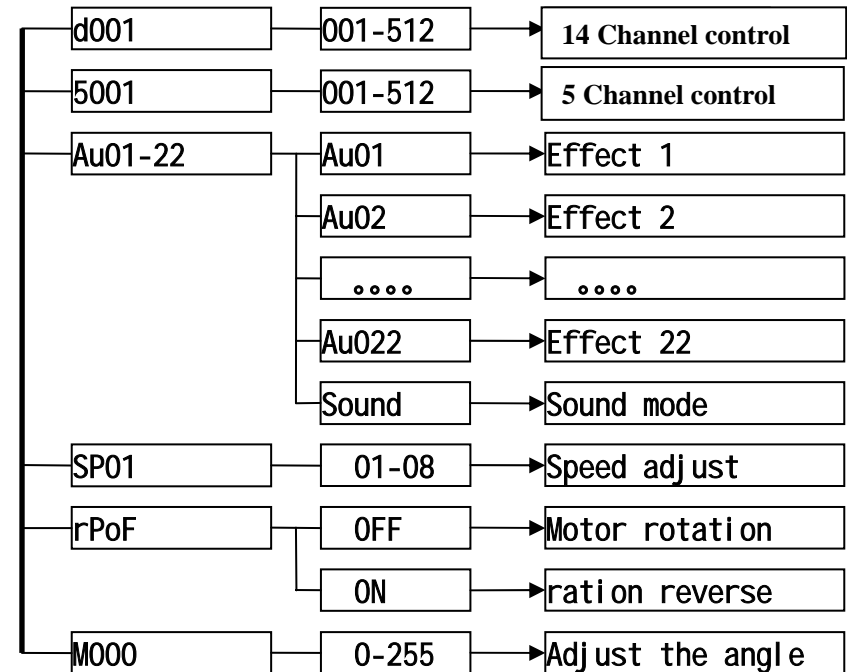

4、 Channels